

DES. PW	DWG. BY PW	CK'D BY MW	DATE JAN. 2015	SCALE NOT TO
CITY ENGINEER			APPROVED BY:	ST-23
DWT. OF PUBLIC WORKS				
CITY OF TUMWATER, WASHINGTON				

TREE PLANTER AND BARRIER IN PLANTER STRIP


APPROVED EQUAL - SPACED
EVENLY OUTSIDE OF ROOT
BALL, PARALLEL TO ROAD,
MINIMUM 2' BELOW AND 4'
ABOVE FINISHED GRADE



GENERAL NOTE: 1
2' MINIMUM
COMPACTED MOUND OF
TOP SOIL BACKFILL

GENERAL NOTE: 1
2'-6" - 2X2 STAKES OR
APPROVED EQUAL - SPACED
EVENLY OUTSIDE OF ROOT
BALL, PARALLEL TO ROAD,
MINIMUM 2' BELOW AND 4'
ABOVE FINISHED GRADE

PLANTERS UP TO 7' WIDE
PLANTERS > 7' TO 10' WIDE
PLANTERS > 10' WIDE
CENTER IN PLANTER
CENTER IN PLANTER
TURF
CURB & GUTTER
STAKES-2 EA.(TYP.)
THE ROOT BARRIER PANEL
EP-2450 (24" H X 24" L) BY
NDS OR APPROVED EQUAL SHALL
BE INSTALLED 15' ON CENTER
AND 4" BELOW THE FINISH
GRADE 28" DEEP ON BOTH
SIDES OF THE TREE.
PLANT 2" ABOVE TREE WELL
GROUND LEVEL (KEEP MULCH 3"
FROM STEM)
ROOT BALL (REMOVE
WIRE BASKET OR
CONTAINER). REMOVE
BURLAP.
TOP DRESS PLANTER PIT
WITH 2" TO 3" OF BARK
MULCH. KEEP MULCH 3"
FROM TREE ROOT COLLAR

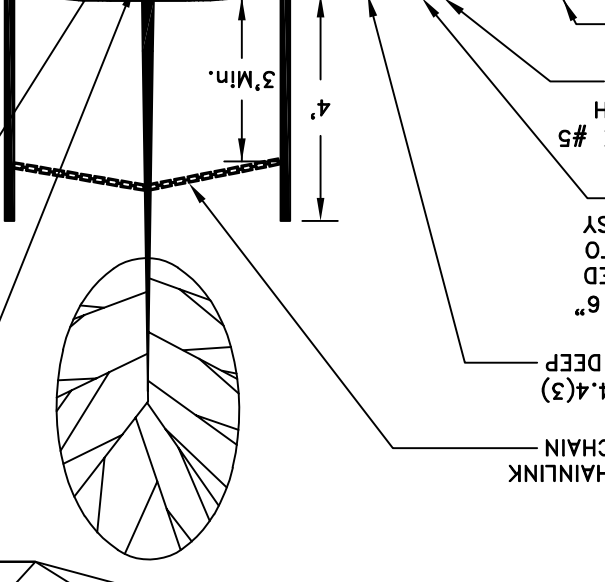

GENERAL NOTE: 1
2'-6" - 2X2 STAKES OR
APPROVED EQUAL - SPACED
EVENLY OUTSIDE OF ROOT
BALL, PARALLEL TO ROAD,
MINIMUM 2' BELOW AND 4'
ABOVE FINISHED GRADE

GENERAL NOTE: 1
2'-6" - 2X2 STAKES OR
APPROVED EQUAL - SPACED
EVENLY OUTSIDE OF ROOT
BALL, PARALLEL TO ROAD,
MINIMUM 2' BELOW AND 4'
ABOVE FINISHED GRADE

GENERAL NOTE: 1
2'-6" - 2X2 STAKES OR
APPROVED EQUAL - SPACED
EVENLY OUTSIDE OF ROOT
BALL, PARALLEL TO ROAD,
MINIMUM 2' BELOW AND 4'
ABOVE FINISHED GRADE